

PiKoder/SPE Engineering board

Construction manual

Version 1.1
dated 04/2024

Gregor Schlechtriem
webmaster@pikoder.de

www.pikoder.de

Table of Contents

Helpful Hints	4
Contents of the Kit and Tools needed	5
Construction	7
Populate the capacitor C1	7
Populate the controller.....	8
Populating the capacitor C2	8
Populate the LED.....	9
Populate the pin header	9
Commissioning	11
Pinning	12
Schematic	13

1

Helpful Hints

Before you start the construction of your PiKoder/SPE, please review these instructions completely. Then you would know what matters and would avoid mistakes that will be hard to fix afterwards.

All SMD components are populated already to simplify the construction and make it more efficient. However, a basic understanding of electronic parts, their handling, and soldering (including integrated circuits) is required for the construction and the commissioning of this engineering board.

Conduct the soldering and the wiring in an orderly and conscientious manner; do not use acidic solder of any kind. Make sure that there are no cold solder joints. Keep these things in mind, because an unclean or bad joint, a defective contact or a bad construction cause a time-consuming search for faults and could possibly cause a destruction of the components.

You can significantly reduce the chance that something will not work. Check every step before continuing. Follow the instructions! Only do the things written in the manual and do not skip any steps! Check every step twice: once for building and once to check.

Please take the time it needs to build this kit. Tinkering is not task work and should be enjoyable!

Please share with me any errors, unclear instructions, or ideas for improvements. You can reach me at gregor@pikoder.com. I am looking forward to your feedback.

2

Contents of the Kit and Tools needed

The kit in front of you contains all the necessary components needed to build a PiKoder/SPE engineering board including the pre-programmed PIC16F1455. All components marked SMD are already populated on the printed circuit board (PCB). Please verify the completeness with the help of the attached checklist.

Parts list: PiKoder/SPE

		√
Resistors		
47k, 0.25W (SMD)	R1	<input type="checkbox"/>
470R, 0.25W (SMD)	R2, R3	<input type="checkbox"/>
10k, 0.25W (SMD)	R4	<input type="checkbox"/>
2k7, 0.25W (SMD)	R5	<input type="checkbox"/>
Capacitors		
100 n	C1	<input type="checkbox"/>
470n	C2	<input type="checkbox"/>
Semiconductors		
PIC16F1455-I/P	IC1	<input type="checkbox"/>
LED 3mm bi-color	IC2	<input type="checkbox"/>
DO-214AC (SMD)	D1	<input type="checkbox"/>
Misc.		
Micro USB jack	J1	<input type="checkbox"/>
Header male 3 pins	PPM_OUT	<input type="checkbox"/>
Header male 4 pins	UART	<input type="checkbox"/>
PCB populated with *		<input type="checkbox"/>

You also need the following tools:

1. Electronic Soldering Iron
2. Electronic Solder
3. Side cutters

Additionally, to commission your board you will need:

1. USB cable
2. PC with PiKoder Control Center next generation (PCCng, downloaded from www.pikoder.com)


3

Construction

The following paragraphs will describe how to populate the components on the circuit board. The silk print on the circuit board will support this process. All parts are populated on the top side. The order of the placement of the components depends on their height; generally, you will place the lower first.

Populate the capacitor C1

Start by placing the capacitor C1 followed by a mild angling of the connection wires to prevent it from falling out. The capacitor is non-polarized; therefore, the alignment is irrelevant.

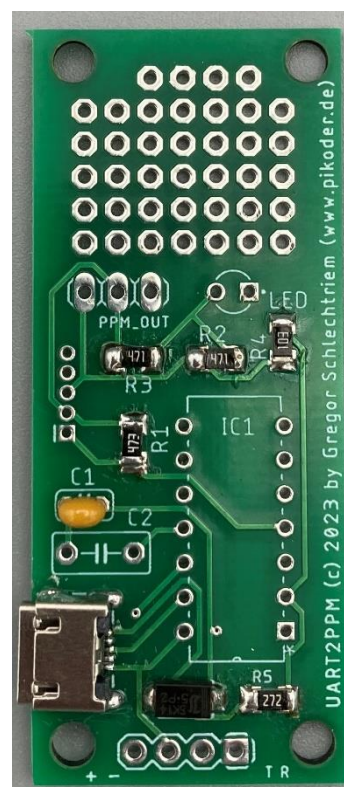

Populate the controller


Place the controller in the position indicated on the top of the circuit board. Once again, verify the positioning: the notch as indicated by the red arrow.

To avoid the controller from falling out of its position when turning the board slightly bend the two outer diagonal pins and then go ahead and solder all the other pins.




Populating the capacitor C2

Now, place the capacitor C2 into the respective position followed by a mild angling of the connection wires to prevent the pieces falling out. This capacitor is also non-polarized meaning that the alignment is irrelevant.

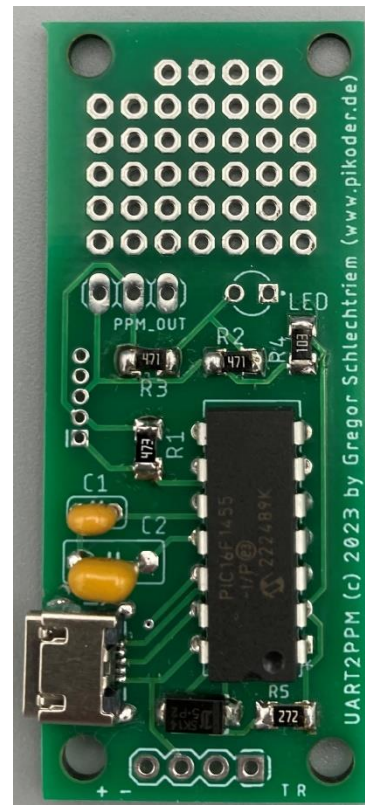


Populate the LED

Place the LED. Please note that the LED is polarized and that the shorter wire needs to be on the left-hand side (see red arrow).

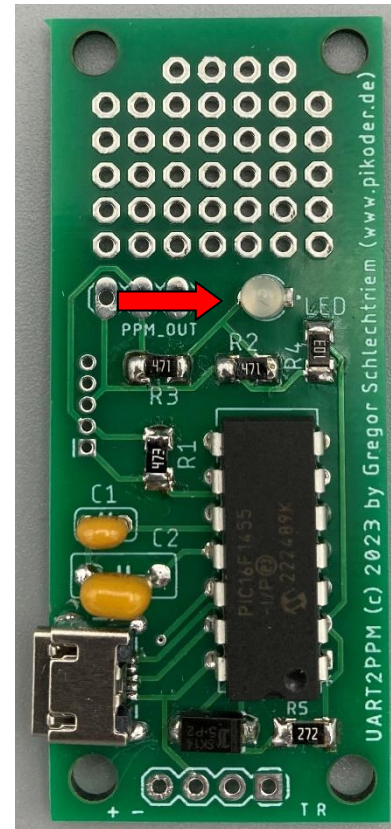

Populate the pin header

The last components you would solder on the circuit board would be the pin headers for PPM and UART.

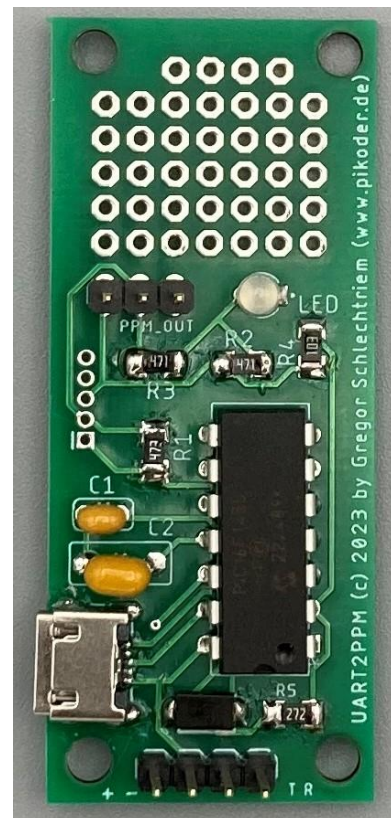

4

Commissioning

Please start of by connecting your PiKoder/SPE engineering board with the USB port of a Windows 10 computer. The PC will install the drivers needed upon the initial connect. Once this step is completed, your board is ready for use.

If you wanted to program PiKoder/SPE settings, then please download the [PiKoder Control Center \(PCC\)](#) from the PiKoder website.

You will find additional information regarding the use and the suitable parameter values in the PiKoder/SPE User manual.

A

Pinning



Please note: when powering the engineering board by USB, then +Vb would be about 5 Volts – 0.3 Volts (voltage drop diode). When powering the board via UART pins, the board would work with 3.3 Volts to 5 Volts.

B

Schematic

